

## Features

- *Designed as per ANSI 63.5, ideal for Site Attenuation Measurements*
- *Frequency Range : 65-180 MHz*
- *Rugged construction*
- *Low Loss and VSWR*
- *FCC, Mil Std, Shielding Effectiveness Testing as per IEEE 299:2006*



## Description

*The Dipole Antenna DIP-6518M is a half wavelength resonant dipole. The Antenna can be tuned to any frequency between 65 MHz-180MHz using the telescopic elements. It has VSWR < 2 dB and balun loss of <1 dB over the entire operating range.*

## Specifications\*

Model / Type	<b>DIP-6518M</b>
Frequency Range	<b>65MHz – 180MHz</b>
Gain	<b>&gt;2dBi</b>
Maximum CW Power	<b>200W</b>
Impedance	<b>50 Ohms</b>
Connector	<b>N Type-Female</b>
Length	<b>14"</b>
Weight	<b>300g</b>
Supplied Accessories	<b>Two Telescopic Elements with Extension Rods</b>
VSWR	<b>&lt;1.5</b>
Balun Loss	<b>&lt;0.5dB</b>

\* Nominal values, subject to change without notice.

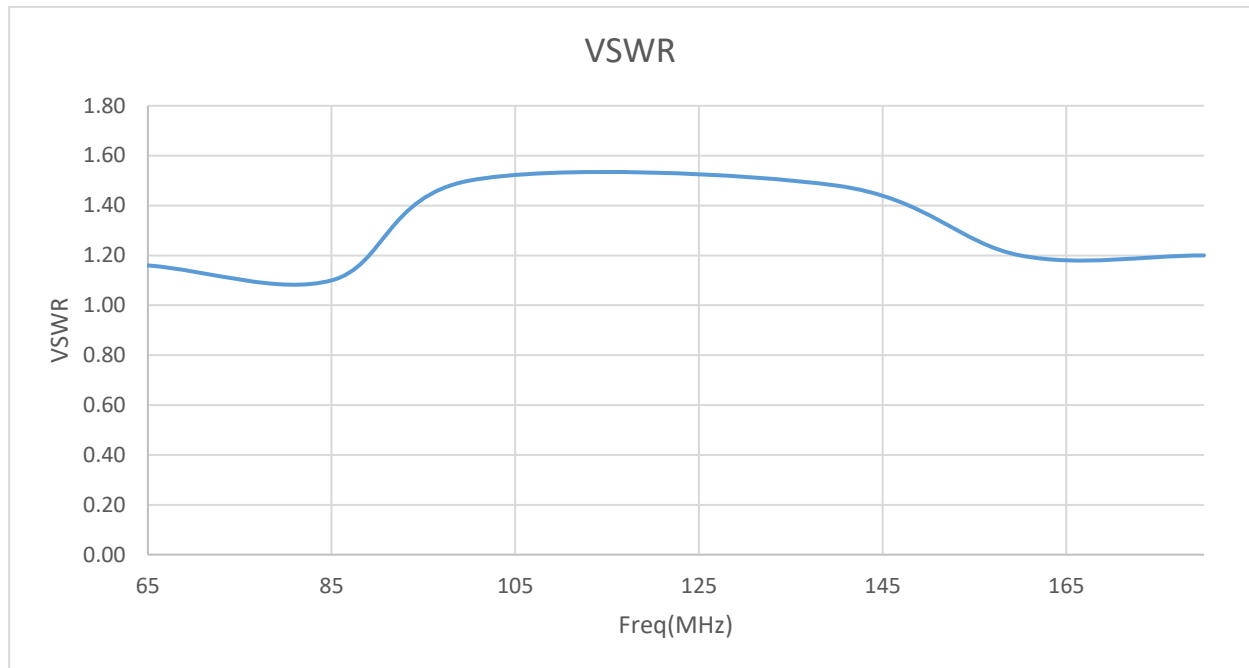
## Calibration

*The antenna Return Loss is measured and given as part of Factory Calibration.*

## Related Products

MAS\_FG\_03

*Modular telescopic non reflective fibre glass mast*

**Typical Antenna VSWR**

**Note: The VSWR values have been obtained by tuning the Dipole length corresponding to each frequency**