


Features

- **Double Ridge Horn Antenna for EMC /EMI Testing & Tx / Rx applications**
- **Frequency Range : 700MHz – 18 GHz**
- **Impedance - 50 Ω (Nominal)**
- **VSWR (Max 2.5)**
- **Individual calibration as per ANSI 63.5/ SAE ARP 958**
- **One year standard warranty.**

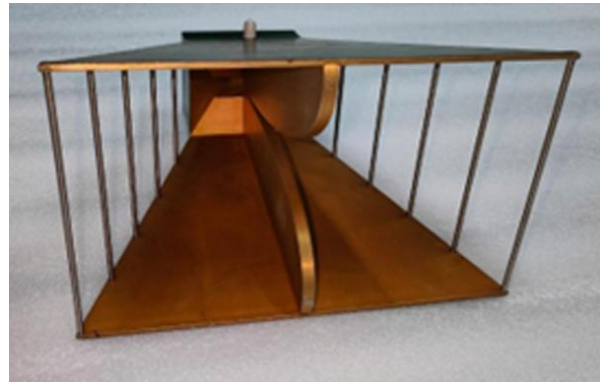

Description

The ANDRH-0118HP is a linearly polarized double ridged high power waveguide horn antenna. The antenna is designed to operate over the frequency range of 700MHz-18 GHz with a VSWR better than 2.5.

The antenna is engineered to be durable and rugged. It is useful in both indoor and outdoor applications. Typical applications include EMC (radiated emissions and immunity), shielding effectiveness, interference monitoring, site surveys and other general Tx / Rx purposes.

The high power antenna is available with N Type connector. The antenna can be mounted using a 22mm diameter stock, compatible with most EMC masts. Threaded mounting adaptors are also available optionally.

Specifications*

Model	ANDRH-0118HP
Frequency Range	700MHz – 18 GHz
Antenna Factor (dB/m)	20 – 45 (dB/m)
Max Continuous Power	750 W (N)
Polarisation	Linear
Connector Type	N Type
Dimensions (L x W x H)	210 x 240 x 142 mm
Weight	~2 Kg
Environmental	-20°C to +40°C
Mounting	22mm diameter tube
Applications	Radiated Emission/ Immunity, SE, Site Surveys

* Nominal values, subject to change without notice.

Calibration











Each antenna is individually calibrated (traceable) at an Open Area Test Site as per ANSI 63.5 or SAE ARP 958. 17025 Accredited calibration is available upon request.


Related Products


MAS_FG_03

Modular telescopic non reflective fibre glass mast

Typical Antenna Performance

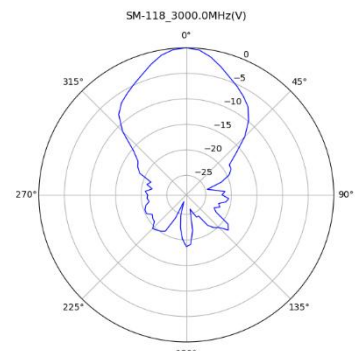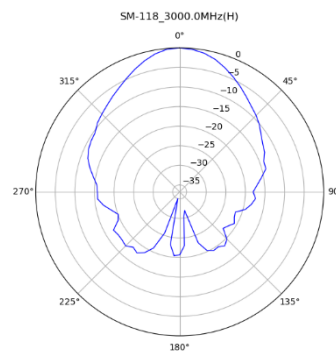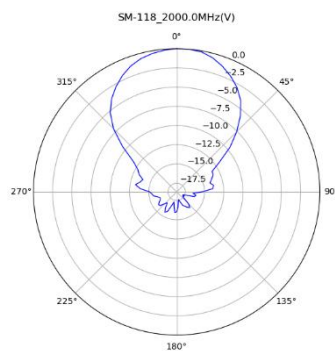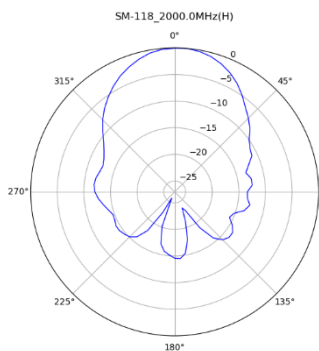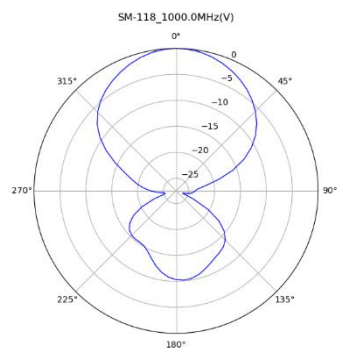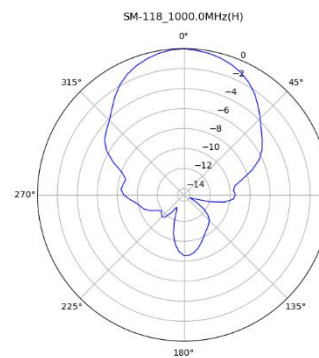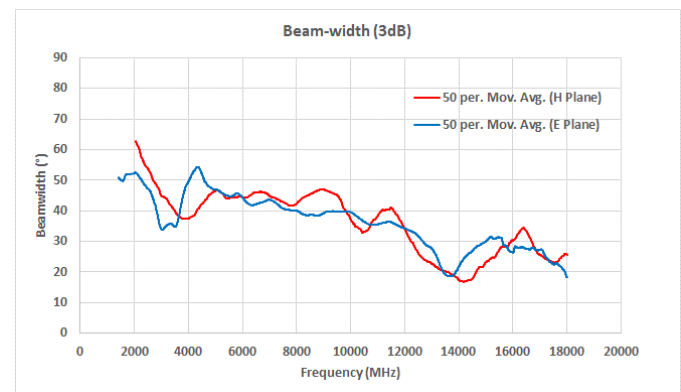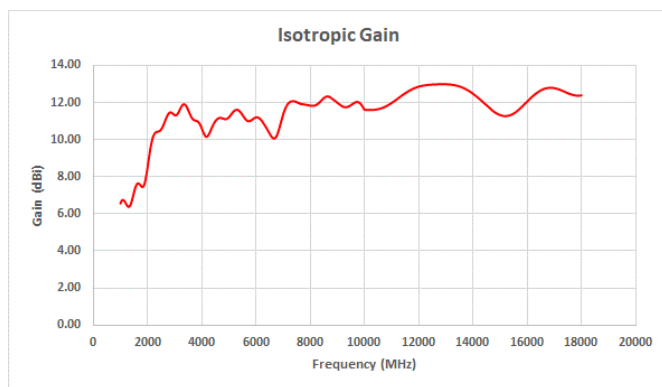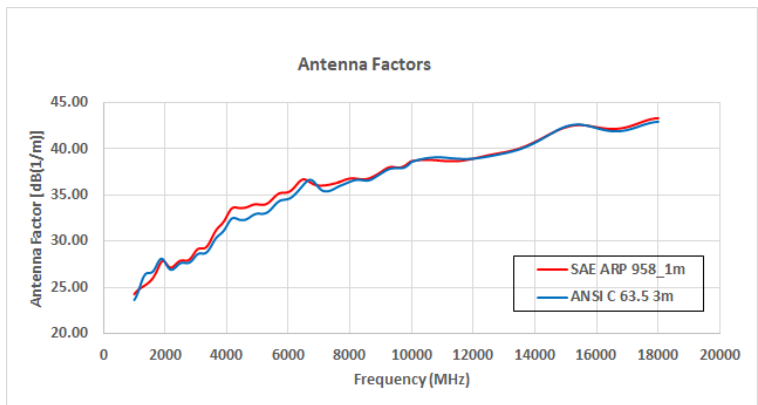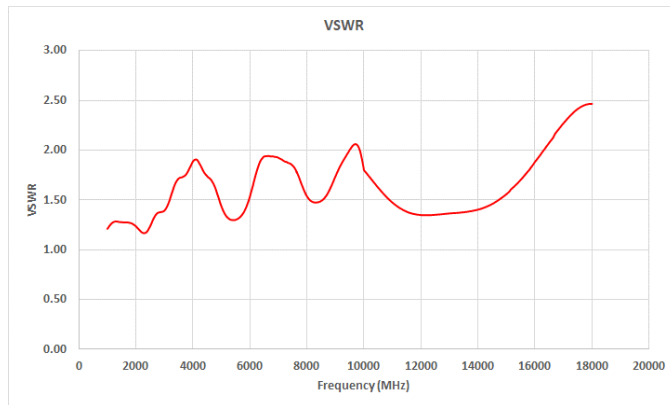

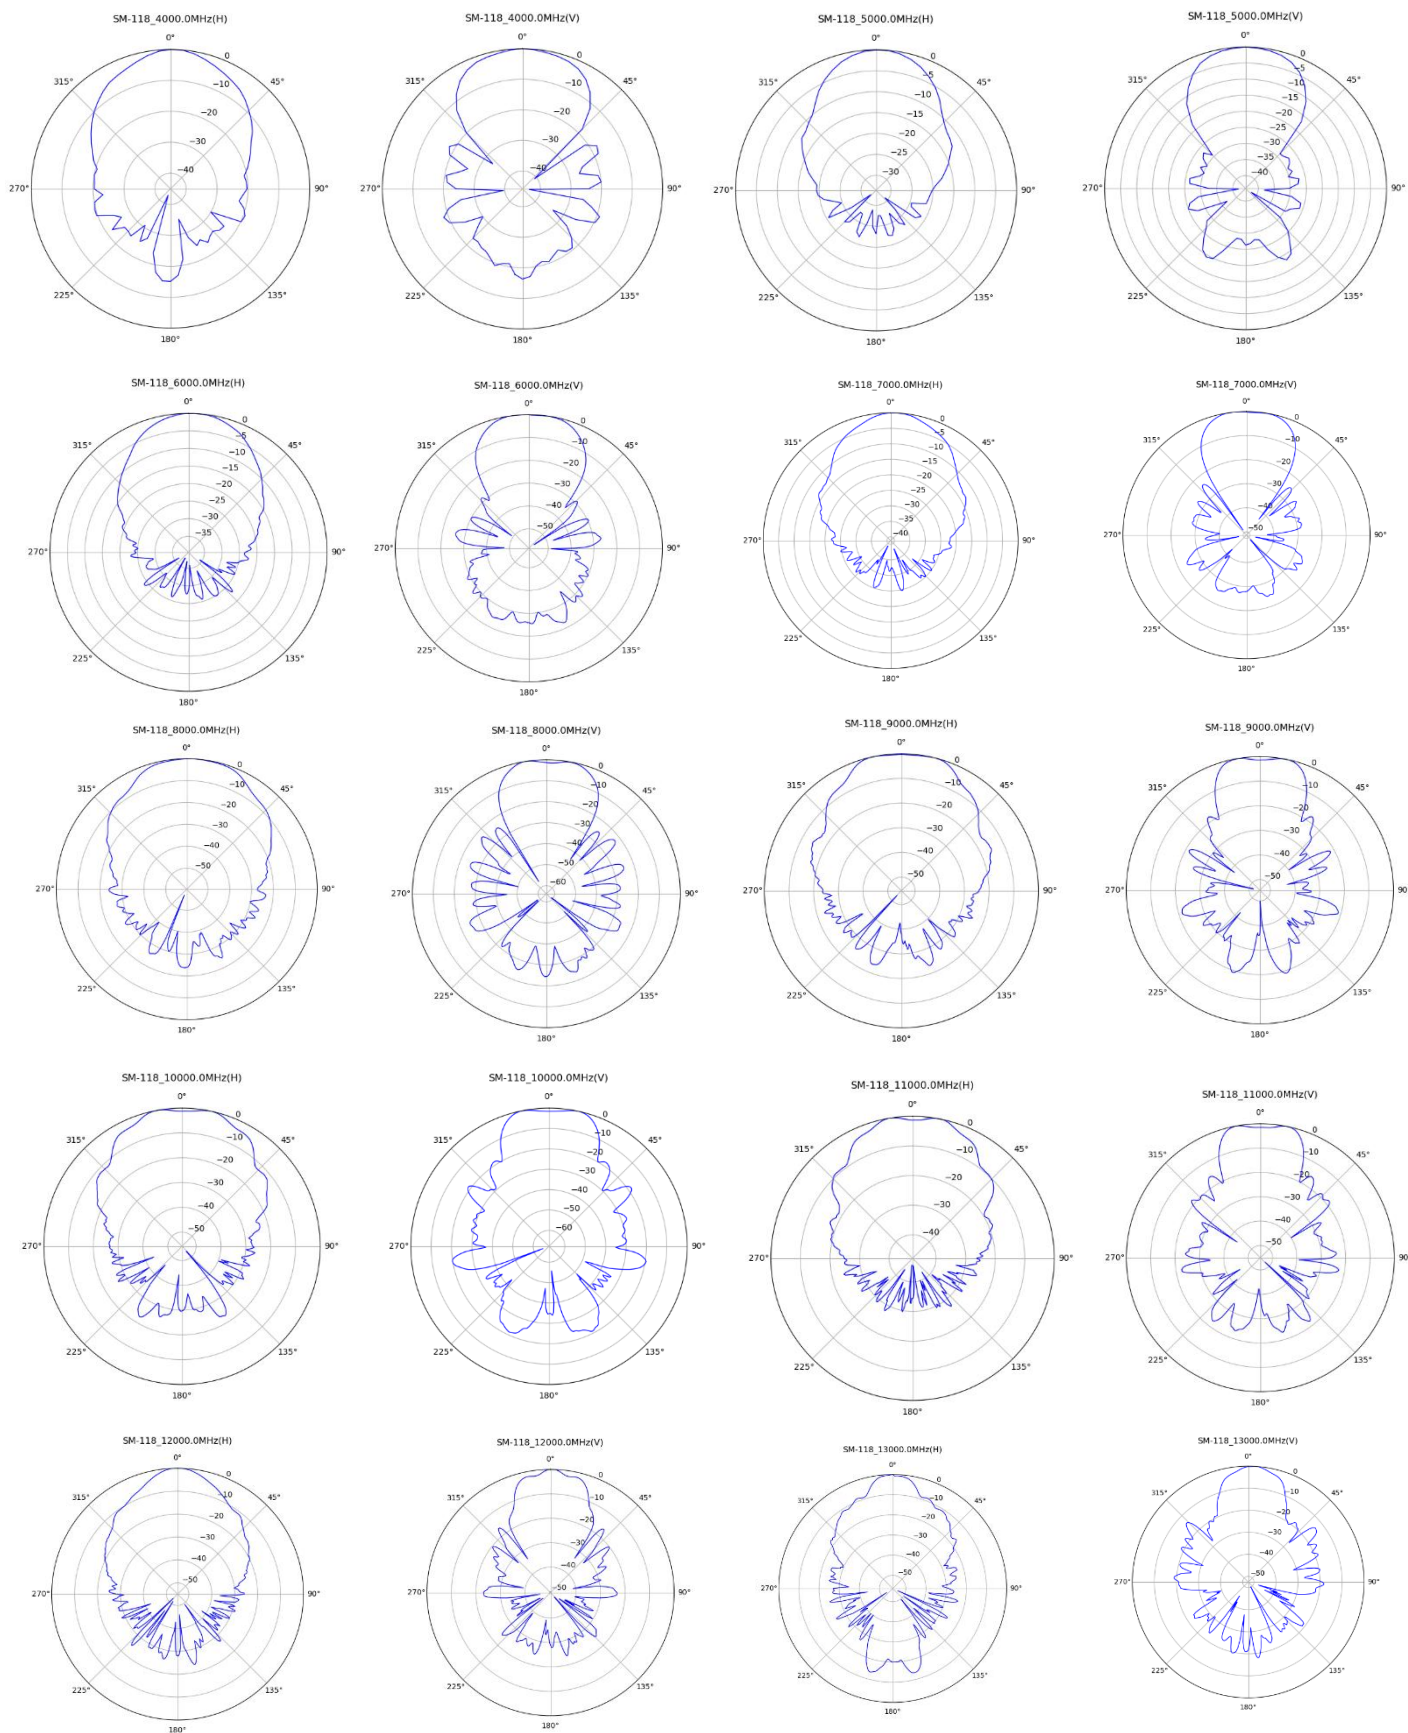

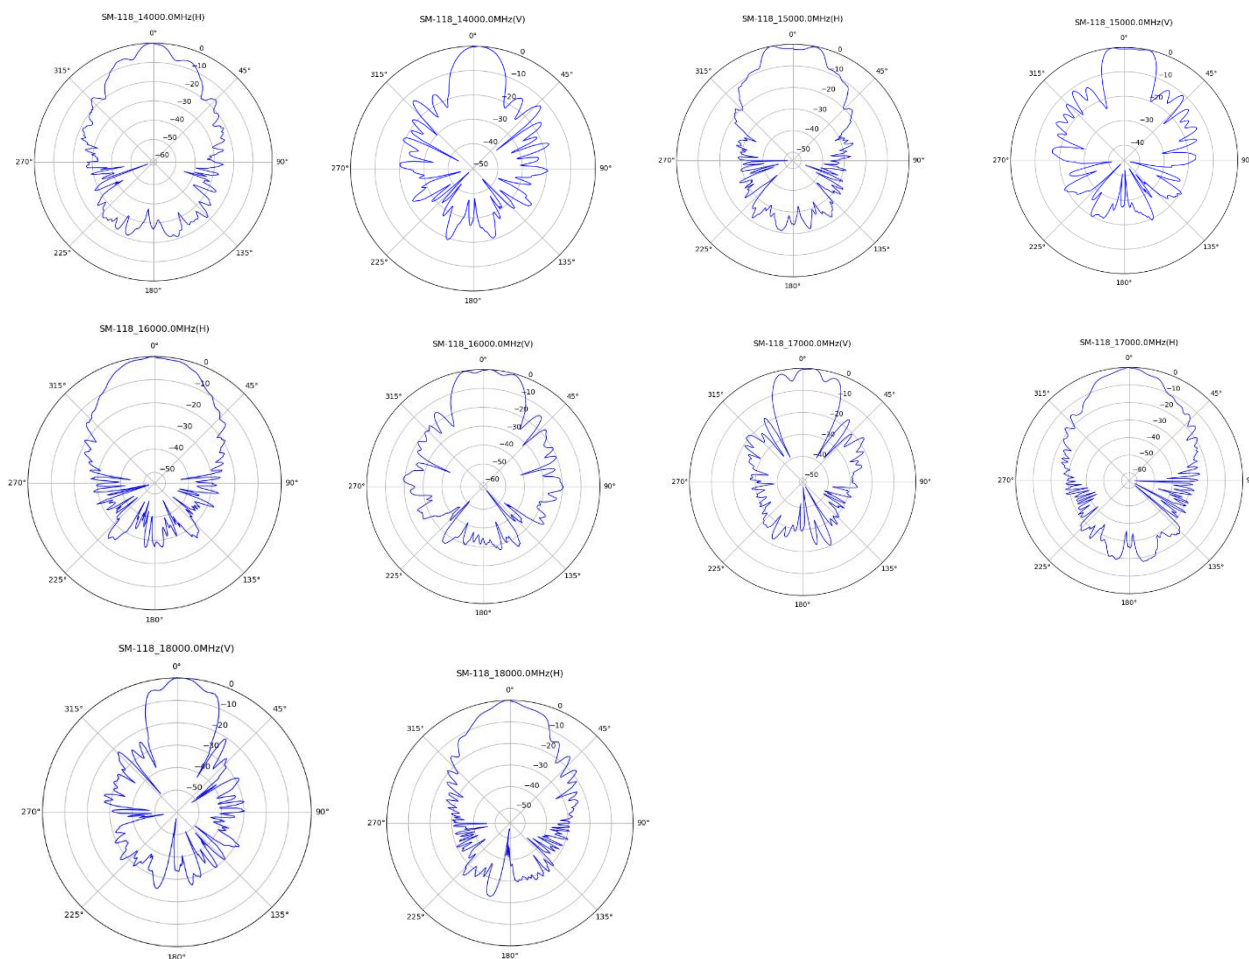

Forward Power (700MHz-18GHz) @ 3m

